



# LED CYLINDER FIXTURES

PENDANT MOUNT



by  UTechnology

Engineered Lighting Solutions



## LED CYLINDER FIXTURES - PENDANT



### Suspended LED Cylinder Fixtures with Endless Versatility

Introducing the Rhythm Elite LED Cylinder Fixtures. Engineered to combine beautiful and powerful lighting with the flexibility of suspended cylindrical fixture lighting. The complete Rhythm Elite family of products includes cylinder fixtures and a track head system with matching form factors, power and light output for smooth and consistent lighting throughout any commercial space. Also available in Surface Mount.

### Why choose the Rhythm Elite family of products?

- A complete engineered solution for your lighting projects
- Designed with ultra low-glare Total Internal Reflection (TIR) optics
- Up to 192 different product configurations for endless versatility
- Complimentary Track Lighting System is available




Please inquire about our Quickship Program




# RHYTHM ELITE

LED CYLINDER FIXTURES - PENDANT | ARCHITECTURAL | SPECIFICATIONS



## PRODUCT DIMENSIONS:

All dimensions are approximate, please acquire a sample of the product for exact sizing.

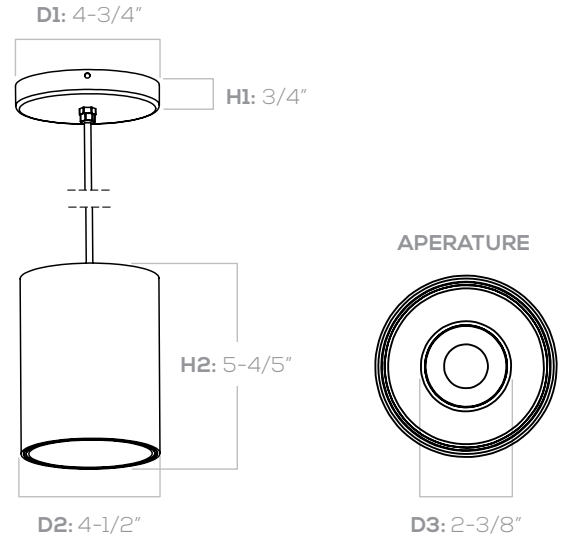

<b>Power Consumption</b>	15W	20W	30W
<b>Input Voltage</b>	120-277VAC*	120-277VAC*	120-277VAC*
<b>Delivered Lumens</b>	1,350 Lm ± 10%	1,800 Lm ± 10%	2,700 Lm ± 10%
<b>Dimensions (inches)</b>	<b>D1: 4-3/4 x D2: 4-1/2 x H1: 3/4 x H2: 5-4/5</b>		
<b>Aperature Size (inches)</b>	<b>D3: 2-3/8</b>		

\* Consult with U Technology for 347V option

## GENERAL SPECIFICATIONS:


<b>Dimming</b>	0-10V*	<b>Optics Technology</b>	Total Internal Reflection (TIR)
<b>CCT</b>	2700K   3000K   3500K   4000K	<b>Temperature Rating</b>	-30°C to +40°C
<b>Finish</b>	Black   White	<b>Warranty</b>	5 years**
<b>CRI</b>	+90   R9 +55	<b>Certification</b>	cETL Listed to CSA Standards, ETL, CE, FCC , RoHs , LM70 >110,000 hrs
<b>Beam Angles</b>	15°   25°   40°   60°	<b>Mounting</b>	Height-adjustable pendant mount with with a 4" octagonal junction box and 46" standard wire length
<b>Rating</b>	IP20		
<b>Construction</b>	Aluminum		

\* Consult with U Technology for other dimming options

\*\* Must meet U Technology's Terms and Conditions

# RHYTHM ELITE

LED CYLINDER FIXTURES - PENDANT | ARCHITECTURAL | ORDER FORM



<b>Project Name:</b>						
<b>Quantity:</b>				<b>Type:</b>		
<b>Part #:</b> UT-RCP-	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>

<b>1 POWER:</b>	<b>15W:</b> 1,350 Lm	<b>20W:</b> 1,800 Lm	<b>30W:</b> 2,700 Lm		
<b>2 BEAM ANGLE:</b>	<b>15D:</b> 15°	<b>25D:</b> 25°	<b>40D:</b> 40°	<b>60D:</b> 60°	
<b>3 CCT:</b>	<b>27K:</b> 2700K	<b>30K:</b> 3000K	<b>35K:</b> 3500K	<b>40K:</b> 4000K	
<b>4 FINISH COLOR:</b>	<b>BK:</b> Black	<b>WH:</b> White			
<b>5 IP RATING:</b>	<b>IP20:</b> Dry Location				
<b>6 CABLE LENGTH:</b>	<b>46IN:</b> Standard 46"		<b>CS:</b> Custom		
<b>ACCESSORIES:</b> Quantity of additional interchangeable TIR optics	<b>15°</b>	<b>25°</b>	<b>40°</b>	<b>60°</b>	