

# VAPOR PROOF SERIES

VAPOR PROOF & VANDALISM RESISTANT LED FIXTURES



## Key Features

- Outdoor and Vandalism resistant fixture
- 90 degree adjustment
- Flexible mounting options



POWER OPTIONS



MONO-COLOUR




WET RATED

# VVP SERIES

VAPOR PROOF & VANDALISM RESISTANT LED FIXTURES



VVP series fixture is an ideal solution for exterior stairwells, parking garages, and both heavy or light industrial applications, with multiple CCT and power options. The housing is constructed of heavy duty die-cast aluminum, making them durable, light-weight, and vandalism resistant. With high transmission PC lenses, the efficacy can reach up to 110 LM/W. Add an optional daylight sensor to have individually controlled autonomous on/off at dawn and dusk.

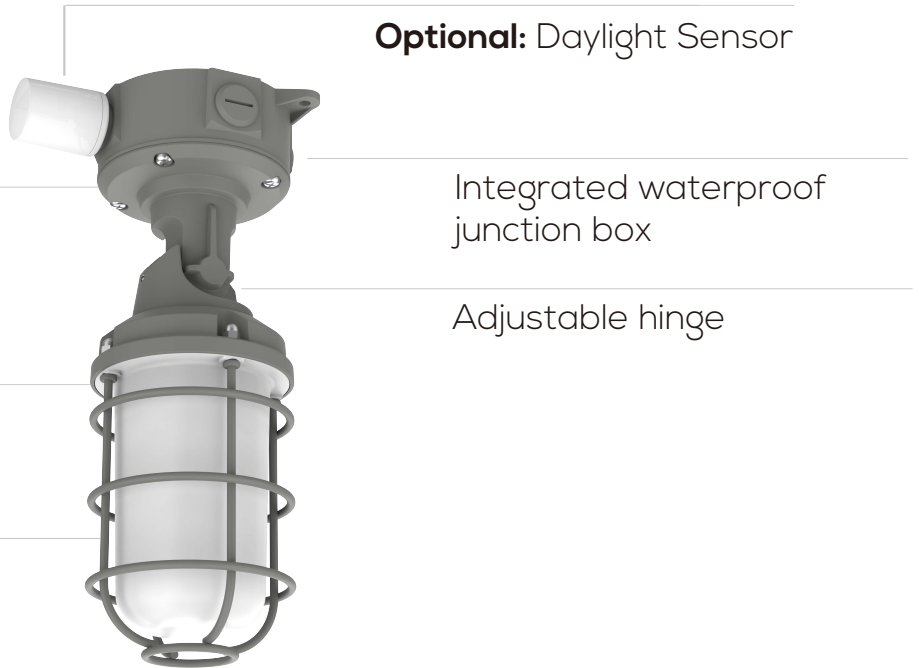

**Optional:** Daylight Sensor

Integrated waterproof junction box




Adjustable hinge

3 CCT options &  
3 power options

Metal protective cage

Shatter resistant polycarbonate lens

## PRODUCT DIMENSIONS:

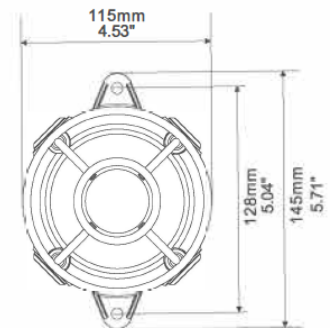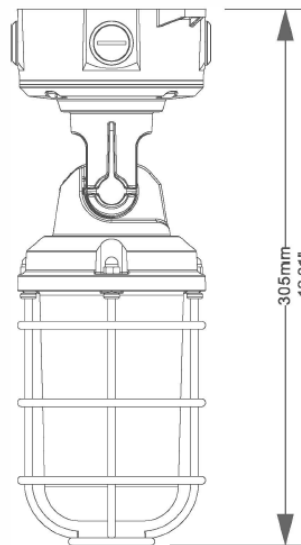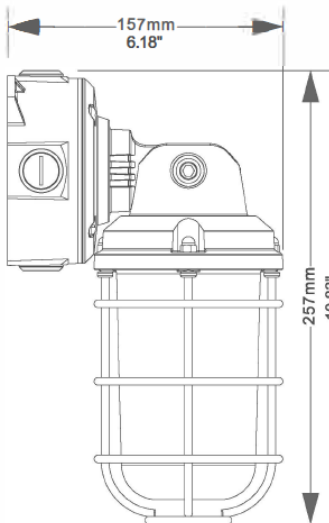

# VVP SERIES

VAPOR PROOF & VANDALISM RESISTANT LED FIXTURES



## ORDERING INFORMATION / PART #:

<b>Project:</b>			
<b>Part #:</b>	UT-VVP-		
<b>Type:</b>		<b>Quantity:</b>	
<b>Power:</b>	<b>15W:</b> 1500lm	<b>20W:</b> 2200lm	<b>30W:</b> 3300lm
<b>CCT:</b>	<b>30K:</b> 3000K	<b>40K:</b> 4000K	<b>50K:</b> 5000K
<b>Optional Accessories:</b>	<b>DS:</b> Daylight Sensor		

## PRODUCT SPECIFICATIONS:


<b>Input Voltage</b>	120V-277V AC	<b>IP Rating</b>	IP65, Wet location
<b>Max Delivered Lumens</b>	3,300lm	<b>Dimensions (L x W x H)</b>	See Page 2
<b>Beam Angle</b>	Shadow Free 360°	<b>Certification</b>	cUL to CSA Standards   DLC 5.1 Premium
<b>Dimming</b>	Non-Dimmable	<b>Warranty</b>	5 years*
<b>Selectable CCT</b>	3000K   4000K   5000K	<b>Expected Life (L70)</b>	50,000+ hrs
<b>Construction</b>	Gray die-cast aluminum Polycarbonate Lens	<b>Temperature Rating</b>	-40°C to +45°C
<b>Installation</b>	Surface mount   Pendant via conduit	<b>IK Rating</b>	IK8
<b>CRI</b>	>80	<b>Accessories</b>	DS: Daylight sensor Photocell
<b>Vertical Adjustment</b>	90°	<i>* Must meet U Technology Terms and Conditions</i>	

## POWER AND DELIVERED LUMENS:

	Available Power		
	15W	20W	30W
UT-VVP-	1,500lm	2,200lm	3,300lm



POWER OPTIONS



MONO-COLOUR



WET RATED